


## Glass Fiber Tape with Aluminum

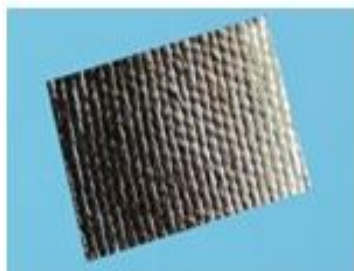

### Description:

Glass fiber tape coating with aluminum foil on one side or both sides. Metal wire reinforced are also available. It is used as heat insulating material and an excellent substitute for asbestos tape.

### Specification:

Temperature: 550°C;

Thickness: 0.8mm to 5.0mm;

Width: 20mm to 300mm.

### Application:

Used for force as insulation for wrapping electric cables and switch boxes.

### Package:

25m/roll, 30m/roll.

In CTN or plastic woven bag of 20kgs net each.



## TAIZHOU KINGLAND SEALING MATERIALS CO.,LTD

No.8,Lunjiang Road ,Dalun Industrial Zone,Jiangyan ,Taizhou ,Jiangsu ,P.R.China 225504

Tel:+86-523-88342320

Fax:+86-523-88324508

E-mail:[info@kinglandsolutions.com](mailto:info@kinglandsolutions.com)

<http://www.kinglandsolutions.com>